

Instrument Solutions DATASHEET

Quality products from leading manufacturers



SIDEPAK™ PERSONAL AEROSOL MONITOR MODEL AM520



The SidePak™ AM520 Personal Aerosol Monitor is a small, portable, battery-operated, data-logging, light-scattering laser photometer that provides real-time aerosol mass concentration readings of dusts, fumes, mists, smoke and fog within a worker breathing zone. Newly designed inlet conditioners increase the mass concentration capability and provide size fraction cut points for PM₁₀, Respirable (PM₄), PM₅ (China Respirable), PM_{2.5}, PM₁ and 0.8µm Diesel Particulate Matter (DPM). This monitor is the perfect solution for real-time, personal aerosol sampling in a variety of workplace environments, including but not limited to general industry, foundries, construction sites, chemical plants, refineries, petrochemical, power and utilities, transportation, aerospace, maritime, confined spaces and mining.

New Features


- + Robust impactors for higher mass concentration range
- + Audible and visual alarms
- + 0.8µm DPM impactor
- + PM₅ China respirable size fraction impactor
- + High capacity battery
- + Color OLED display

Features and Benefits

- + Real-time mass concentration measurement and data logging for "in-the-field" data analysis
- + Push button menu operation or programmable through newly improved TrakPro™ v5 Software
- + User selectable alarm levels to alert workers to high aerosol concentrations
- + Newly designed robust impactors enable reliable size fraction measurements at higher aerosol concentrations over longer run times

Dare to Compare!


User-settable audible and visual alarms as well as newly designed impactors, for more size fraction options, make this instrument a valuable tool for workplace exposure monitoring. The new impactors provide reliable size fraction at a much higher mass concentration, allowing a longer run time with improved accuracy.

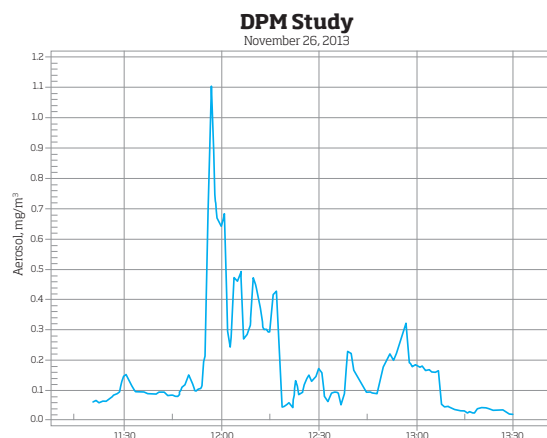

Time History – Graphically displayed, logged data can display high and low exposure concentrations that cannot be identified with traditional gravimetric sampling. This example of actual customer data illustrates the value of seeing what time peak exposure occurred. This enables an industrial hygienist to investigate the cause of the spike at 12:00 and recommend corrective actions specific to the cause of the exposure without delay.



UNDERSTANDING, ACCELERATED

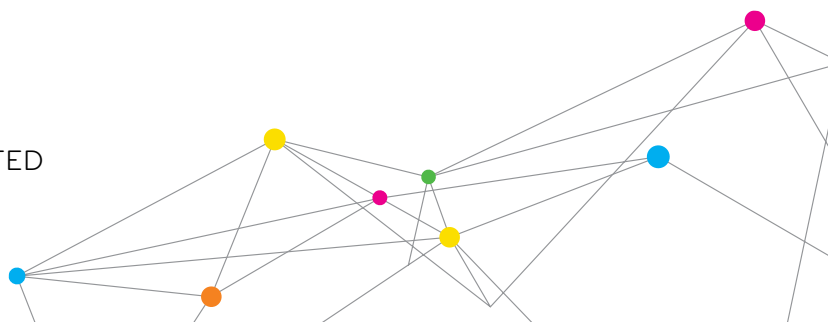

SPECIFICATIONS

SIDEPAK™ PERSONAL AEROSOL MONITOR MODEL AM520

Sensitivity

Sensor Type 90° light scattering, 650 nm laser diode
Calibration Calibrated against a gravimetric reference using the respirable fraction of standard ISO 12103-1, A1 Test Dust

Aerosol Concentration Range 0.001 to 100 mg/m³

Particle Size Range 0.1 to 10 µm

Minimum Resolution 0.001 mg/m³

Zero Stability ±0.001 mg/m³ over 24 hours using 10 second time constant

Temperature Coefficient Approximately +0.0005 mg/m³ per °C (for variations from temperature at which instrument was last zeroed)

Flow Rate

Range User-adjustable, 0 to 1.8 liters/min (L/min) Note: Upper range is dependent on impactor or cyclone attached to the SidePak AM520 Monitor

Temperature Range

Operating Range 32° F to 120° F (0° C to 50° C)

Storage Range -4° F to 140° F (-20° C to 60° C)

Operational Humidity 0 to 95% RH, non-condensing

Time Constant (OLED Display)

Range User-adjustable, from 1 to 60 seconds

Built-in Inlets

Standard inlet Not size-specific

PM_{1.0} impactor 50% cut-off at 1.0 µm

PM_{2.5} impactor 50% cut-off at 2.5 µm

PM_{5.0} impactor 50% cut-off at 5.0 µm

PM₁₀ impactor 50% cut-off at 10.0 µm

Attachable Cyclones

4 µm Dorr-Oliver 50% cut-off at 4.0 µm

0.8 µm DPM 50% cut-off at 0.8 µm

Alarms

Alarm Types General, STEL

Default Settings 0.5 mg/m³, 1 mg/m³, 3 mg/m³, 5 mg/m³, 15 mg/m³, Off
Programmable from 0.001 to 999 mg/m³ through TrakPro Software

Alarm Indicator 95 dBA (at one foot) audible horn, blinking red LED, flashing red OLED display

Ringback Delay 30 sec, 1 min, 3 min, 5 min, 10 min, Off

Data Logging

Data Points Approx. 80,000
(55 days logging once per minute)

Logging Interval User-adjustable, from 1 second to 60 minutes

User-Select Calibration Factors

Factory Setting 1.0 (non-adjustable)

Ambient Setting 0.38 (non-adjustable)

User-Defined Settings 5, with user-defined labels via TrakPro Software

Range 0.1 to 10.0, user-adjustable

Physical

External Dimensions 5.1 x 3.7 x 3.1 inch
129.5 mm x 94 mm x 78.4 mm
with 803300 battery

Weight 22 oz (0.62 kg) with 803300 battery

Display 160 x 128 resolution color OLED display

Tripod Mounting Nut ¼-20 female thread

Battery

Rating 5400 mAH Li-Ion Pack

Run Time Greater than 20 hours at 1.7Lpm with a PM_{2.5} impactor

Charge Time 4.0 hours (typical with a fully depleted battery)

Power Supply (p/n 803302)

Input Voltage Range 100 to 240 VAC, 50 to 60 Hz

Output Voltage 12 VDC @ 3.0A

Maintenance

Factory Clean/Calibrate Recommended annually

User Zero Calibration Before each use

User Flow Calibration As needed with use of inlet conditioner

Communications Interface

Type USB 2.0

Connector, Instrument USB Micro-B (socket)

Minimum Computer Requirements for TrakPro Software

Communications Port Universal Serial Bus (USB) v2.0 or higher

Operating System Microsoft Windows® 7, 8, or 10
(32-bit or 64-bit) operating systems

Approvals

AM520 with TSI Battery Pack P/N 803300



Immunity EN61326-1:2013

Emissions EN61326-1:2013 Class B

Safety IEC 61010-1:2010

IEC 60825-1:2014

SAVE TIME AND MONEY

Real-time aerosol monitoring instruments like the SidePak AM520 Personal Aerosol Monitor can be used to measure and evaluate workplace exposures without delay, facilitating immediate feedback and corrective action. This means no more waiting for sampling data to be returned from the analytical lab.



UNDERSTANDING, ACCELERATED

Instrument Solutions: Quality products from leading manufacturers



Hire

BSRIA Instrument Solutions offer an extensive range of quality test and measurement instrumentation for you to hire. The widest range and in-depth stocks of the latest equipment are available at competitive prices. BSRIA Instruments Solutions has built its fine reputation by providing the most reliable and advanced equipment from the leading manufacturers and supporting it with a high level of customer service and technical support to meet with your requirements and expectations.

- Fast delivery: next day or same day delivery available
- Flexible terms: short and long term hire contracts
- Latest technology: new models added to stock regularly

E: hire@bsria.co.uk

Sales

BSRIA Instruments Solutions specialises in providing test and measurement products in many fields of measurement, especially in the building services sector. Appointed as an official distributor for over 25 of the leading manufacturers in the test and measurement instrumentation market, we are able to offer a choice of the best instruments available to reach your requirements.

- Call for a competitive quote
- Many instruments available ex-stock
- In-house calibration options available on most instruments
- On-line purchasing available for many products on our website

E: instruments@bsria.co.uk

Calibration

The ISO and UKAS accredited calibration department within BSRIA Instrument Solutions draws upon many years of BSRIA's experience in the building services industry. This unparalleled knowledge of the measurement and instrumentation requirements of the services industry gives the calibration department a unique advantage to meet your calibration needs.

- Fast service: 5 days standard turnaround
- 24 hours and while-you-wait services available on request
- Custom calibration points
- For a full scope of calibration please call

E: calibration@bsria.co.uk



Improving the built environment



Delivering knowledge



Measuring compliance and performance



International

BSRIA North
Preston

BSRIA head office
Bracknell

Calibration laboratories and offices in the South and North:

Old Bracknell Lane West, Bracknell, Berkshire
RG12 7AH

68 Walton Summit Road, Walton Summit Centre,
Bamber Bridge, Preston, Lancashire PR5 8AQ



W: www.bsria.co.uk/instruments

T: 0800 254 5566 (UK Free)

T: +44 (0)1344 459 314

